



TIME DOMAIN ANALYSIS (A VERY SUPERFICIAL APPROACH)



Reminder: Laplace Transform

- The Laplace Transform (LT) is an integral transform similar to the Fourier Transform
- The LT of a function $f(t)$ is defined as

$$F(s) = \mathcal{L}\{f\}(s) = \int_0^{\infty} f(t)e^{-st} dt,$$

- s is a *complex variable*
 - This integral does not exist for all possible $f(t)$ and s !
 - (If s has a real part >0 , $f(t)$ must not grow faster than $C e^{\text{Re}(s)t}$)
- The Inverse Transform is more complicated:

$$\mathcal{L}^{-1}\{F(s)\} = \frac{1}{2\pi i} \int_{\gamma-i\infty}^{\gamma+i\infty} e^{st} F(s) ds$$

- where $\gamma > \text{Re}(\text{all singularities of } f)$.
- This is a line integral in the complex s -plane



Properties of Laplace Transforms

- For $f(t) = \mathcal{L}^{-1}\{F(s)\}$, $g(t) = \mathcal{L}^{-1}\{G(s)\}$ we have:

Function	Laplace Transform	
$af(t) + bg(t)$	$aF(s) + bG(s)$	Linearity
$f'(t)$	$sF(s) - f(0)$	Derivative
$\int_0^t f(\tau) d\tau = (u * f)(t)$	$\frac{1}{s}F(s)$	Integration
$(f * g)(t) = \int_0^t f(\tau)g(t - \tau) d\tau$	$F(s) \cdot G(s)$	Convolution
$f(t - a)u(t - a)$	$e^{-as}F(s)$	Time Shift

$u(t)$: Step function




Reminder (hopefully..): Integration with Residues

This is very simplified!
 The statements are valid under certain conditions only.
 Consult a book on Complex Analysis!

- The *Residue Theorem* states that the line integral of a function $f(z)$ along a closed curve γ in the complex z -plane is $2\pi i \times$ (the sum of the residues at the *singularities* a_k of f):

$$\oint_{\gamma} f(z) dz = 2\pi i \sum \text{Res}(f, a_k)$$



Wikipedia

- The *residue* is a characteristic of a singularity a_k (or c below)
 - For a first order (simple) pole at c (f behaves \sim like $1/z$ at c):

$$\text{Res}(f, c) = \lim_{z \rightarrow c} (z - c) f(z).$$

- For a pole of order n :

$$\text{Res}(f, c) = \frac{1}{(n - 1)!} \lim_{z \rightarrow c} \frac{d^{n-1}}{dz^{n-1}} ((z - c)^n f(z)).$$



Example for Integration with Residues


- Assume we want to find $A = \int_{-\infty}^{\infty} \frac{1}{x^2 + 1} dx$.
- The function $f(z) = \frac{1}{z^2 + 1} = \frac{1}{(z + i)(z - i)}$ has poles i and $-i$

- The residue at i is:

$$Res(f, i) = \lim_{z \rightarrow i} f(z)(z - i) = \lim_{z \rightarrow i} \frac{1}{(z + i)} = \frac{1}{2i}$$

- The line integral along green curve C is

$$\int_C f(z) dz = 2\pi i Res(f, i) = \pi$$

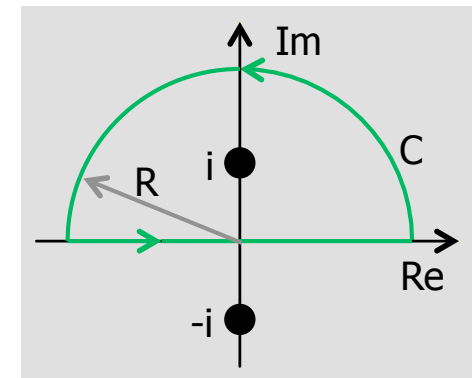

- When we increase the size of the curve, the contribution of the upper arc vanishes* (the length of the arc rises $\sim R$, but f falls as $1/R^2$)

- Therefore $A = \int_{-\infty}^{\infty} \frac{1}{x^2 + 1} dx = \pi$



Example 1: Inverse LT of 1/s

- For $F(s) = \frac{1}{s}$:

$$L^{-1} \left\{ \frac{1}{s} \right\} = \frac{1}{2\pi i} \int_{\gamma-i\infty}^{\gamma+i\infty} e^{st} \frac{1}{s} ds$$

- The integral has just one pole at $s = 0$.
- The Residuuum is:


$$\text{Res} \left[e^{st} \frac{1}{s}, 0 \right] = \text{Limit} \left[(s - 0) e^{st} \frac{1}{s}, s \rightarrow 0 \right] = \text{Limit} \left[e^{st}, s \rightarrow 0 \right] = 1$$

- So the Integral is

$$\int_{\gamma-i\infty}^{\gamma+i\infty} \dots ds = 2\pi i \text{Res} [\dots, 0] = 2\pi i$$

- And we just have

$$L^{-1} \left\{ \frac{1}{s} \right\} = 1$$

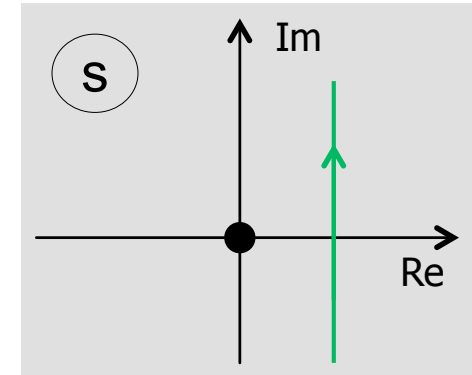




Example 2 ('frequency shift'):

- For $F(s) = \frac{1}{s+k}$:

$$L^{-1}\{F[s]\} = \frac{1}{2\pi i} \int_{\gamma-i\infty}^{\gamma+i\infty} e^{st} \frac{1}{s+k} ds$$

- The pole is now at $s = -k$.

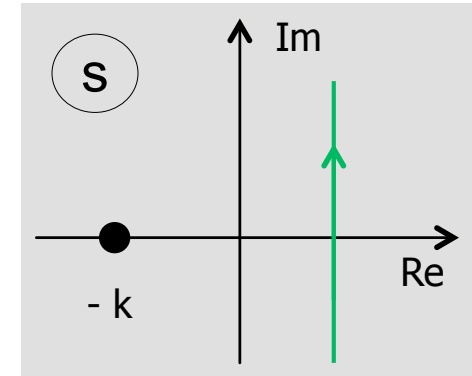

- The Residuum is:

$$\text{Res}\left[e^{st} \frac{1}{s+k}, 0\right] = \text{Limit}\left[(s+k) e^{st} \frac{1}{s+k}, s \rightarrow -k\right] = e^{-kt}$$

- And we just have

$$L^{-1}\left\{\frac{1}{s+k}\right\} = e^{-kt}$$



Why is Laplace Transform so Useful ?

- Differential / Integral equations in t can be converted to Analytical equations in s , where they can be solved
- EQ(t) \rightarrow transform to $H(s)$ \rightarrow Solve in s \rightarrow Transform back

- Example: Radioactive Decay

- $f[t]$: Number of atoms at time t

- The # of decaying atoms is prop. to # of atoms: $\frac{df[t]}{dt} = -\lambda f[t]$

- With $F[s] = \text{LT}(f[t])$:
($f[0] = N_0$ is initial number of atoms)

$$s F[s] - f[0] = -\lambda F[s]$$

- This can be solved in s -domain:

$$F[s] = \frac{N_0}{s + \lambda}$$

- Transforming back (see example) gives: $f[t] = N_0 e^{-\lambda t}$




LAPLACE TRANSFORM AND TRANSFER FUNCTION



Time Response


- The **transfer function** tells us how sine inputs are modified by the system, i.e. what happens in the **frequency domain**
- How can we get the **time response** for an arbitrary input?

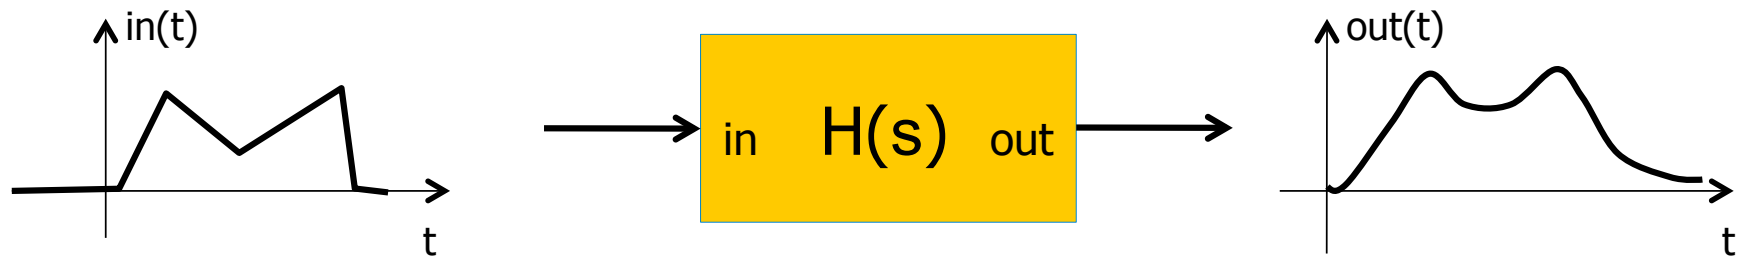

- For a *linear, time invariant (LTI)* system, we can use:
 - The response of a $k \times$ larger input pulse is just $k \times$ larger
 - The response for a time shifted input is time shifted
- For such a system we can
 - express the input signal as a superposition of 'simple' signals
 - Calculate the output for each 'simple' component
 - Superimpose the outputs



Illustration

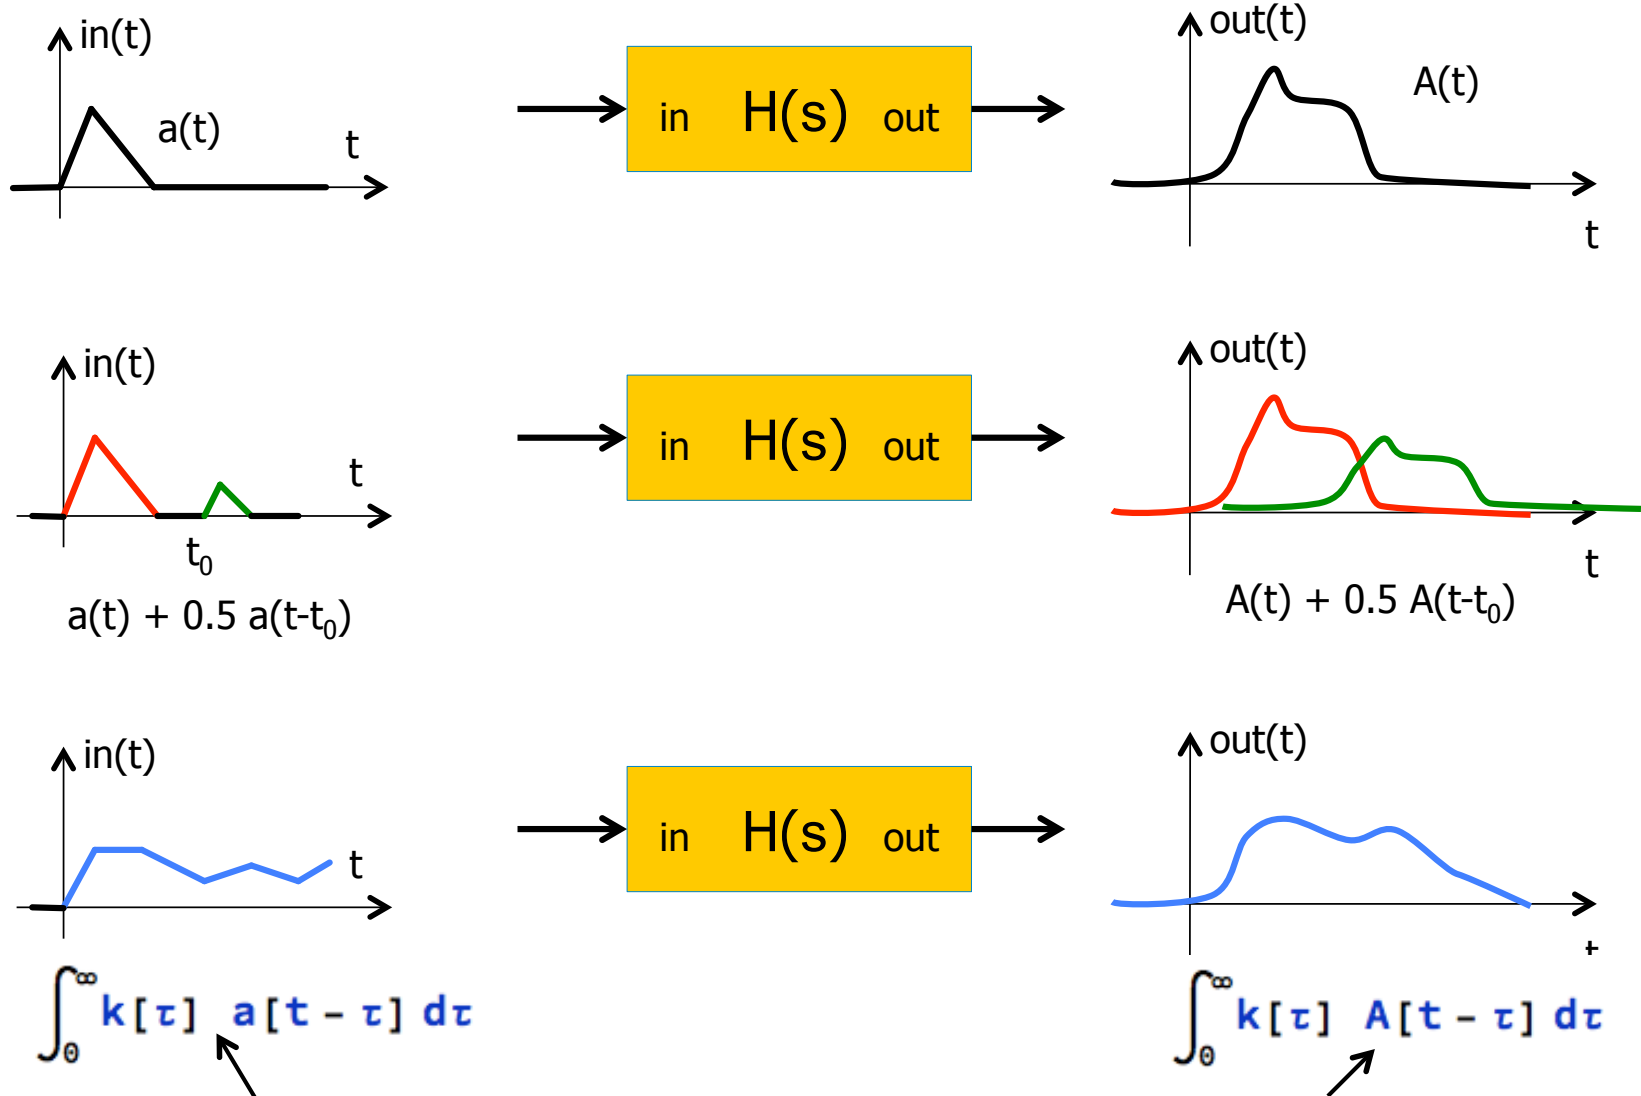

Note that the integrals are CONVOLUTIONS (Faltung) of two functions!



Clever Choice of the 'nominal input' $a[t]$


- To make the convolutions as simple as possible, it is best to choose $a[t]$ to be Dirac Delta 'function'
- For any input function we can write

$$f_{in}[t] = \int_{-\infty}^{\infty} f_{in}[\tau] \delta[t - \tau] d\tau$$

- The output is then just

$$f_{out}[t] = \int_{-\infty}^{\infty} f_{in}[\tau] \Delta[t - \tau] d\tau$$

where $\Delta[t]$ is the response of the circuit to a $\delta[t]$ input, the 'delta response':

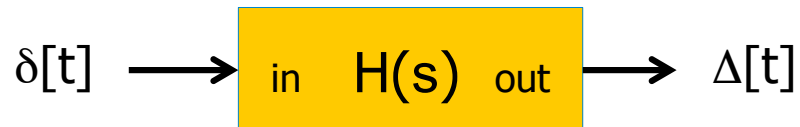

Note: I am a bit sloppy here with integration limits..



What is the Delta Response $\Delta[t]$?

- We do not know $\Delta[t]$, but: it turns out that its LT is just the transfer function!

The Laplace Transform of the Delta Response of a circuit is just given by its transfer function $H[s]$

- Knowing that $LT(\Delta[t]) = H[s]$, what is $\Delta[t]$?
It's the Inverse LT:

$$\Delta[t] = LT^{-1} \{H[s]\}$$

- Why is this?
 - If we write down Kirchhoff's rules in the time domain, we get differential / integral equations.
 - The 'topology' of the equations is the same as using complex impedances.
 - If we transform this, we can get the impulse response



General Time Response

- Start from $f_{\text{out}}[t] = \int_{-\infty}^{\infty} f_{\text{in}}[\tau] \Delta[t - \tau] d\tau$

- Laplace transform both sides and use Convolution rule:

$$F_{\text{out}}[s] = \text{FT} \left\{ \int_{-\infty}^{\infty} f_{\text{in}}[\tau] \Delta[t - \tau] d\tau \right\} = F_{\text{in}}[s] \text{FT} \{ \Delta[t] \}$$

- Use our knowledge that $\text{FT} \{ \Delta[t] \} = H[s]$

$$F_{\text{out}}[s] = F_{\text{in}}[s] H[s]$$

- And transform back:

$$f_{\text{out}}[t] = \text{FT}^{-1} \{ \text{FT} \{ f_{\text{in}}[t] \} H[s] \}$$


To calculate the time response of a circuit to an arbitrary input $f[t]$:

1. Laplace Transform $f[t]$, yielding $F[s]$
2. Multiply with the Transfer function $H[s]$
3. Transform back




Important Input Functions

- The most important input to test a circuit is the Unit step:
 - It is often called $u[t]$, Heaviside Step function, UnitStep,...

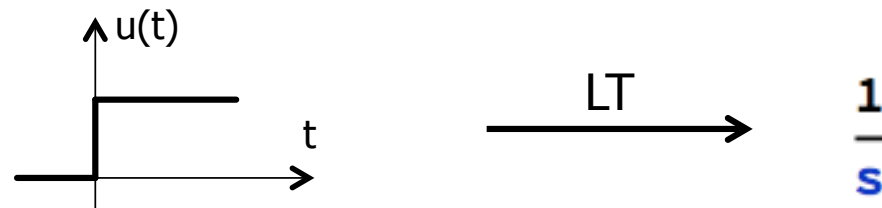

- For a Shifted Step, use Time Shift rule:

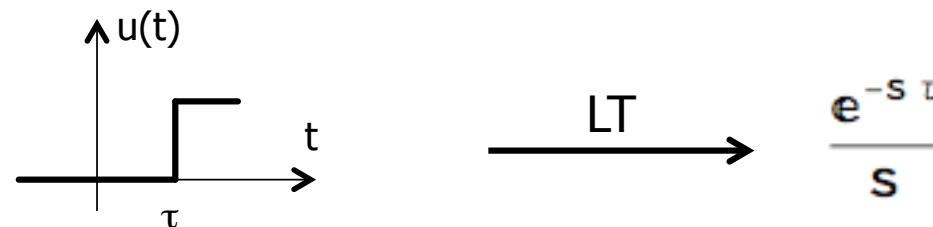


- A rectangular Pulse is just the difference of two Unit Steps
- For very short input signals (charge deposition in detector), input is the Dirac Delta, with $LT = 1$.



Example 1: Step Response of Low Pass

- Consider

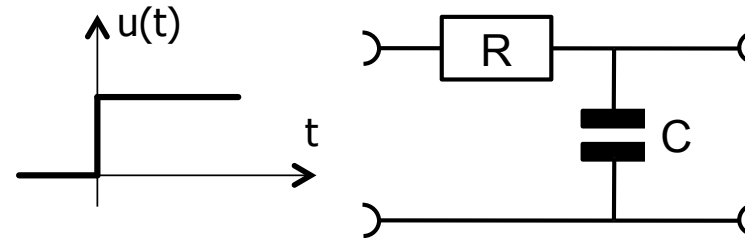

```
In[295]:= H[s_] =  $\frac{1}{1 + \frac{s}{\tau}}$  ;
```

```
In[296]:= InverseLaplaceTransform[ $\frac{H[s]}{s}$ , s, t]
```



```
Out[296]=  $1 - e^{-t \tau}$ 
```

- We knew that already...



Example 2: Response of Low Pass to Slope

- Now Consider a linear input ramp $in[t] = k t$

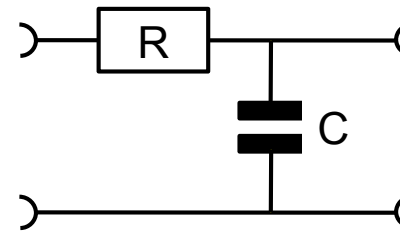

- The LT is

$$\text{In[301]} := \text{IN}[s_] = \text{LaplaceTransform}[k t \text{UnitStep}[t], t, s]$$

$$\text{Out[301]} = \frac{k}{s^2}$$

- So our response is

$$\text{In[303]} := \text{out}[t_] = \text{InverseLaplaceTransform}[\text{IN}[s] H[s], s, t]$$

$$\text{Out[303]} = k \left(t - \frac{1}{\tau} + \frac{e^{-t/\tau}}{\tau} \right)$$

Plot[out[t] /. {k -> 1, tau -> {0.1, 0.2}}, {t, 0, 30}]

